


## ReLock 8-Station Compact Quad



DRILLED THRU. AND  
C'BORED FOR  
"D" S.H.C.S.  
(4) PLACES

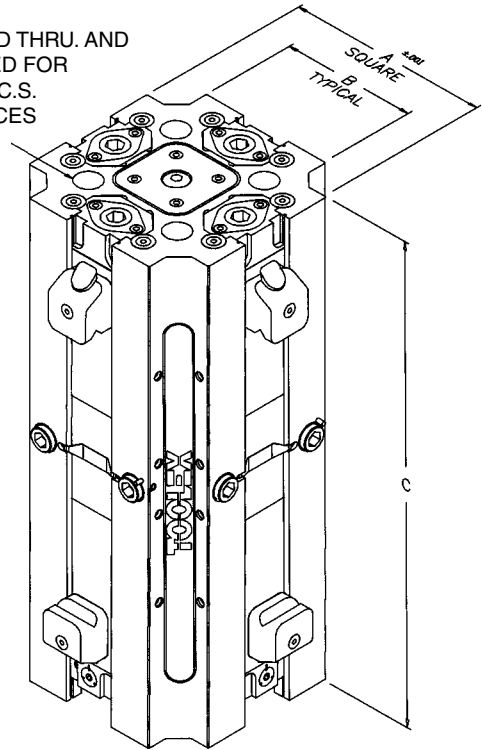

- Designed for machining center with small work envelopes like the Tsugami FMA3.
- Through column mounting holes are included to mount directly to the pallet of an HMC without the need for a baseplate.
- Clamping pressure = 0 to 6,000 lbs.
- Recommended foot lbs. = 45-50
- Mounting kit included.

*Call for print with mounting information*

Part Number	A	B	C	Package Contents
RWS40S8	7.000	4.000	13.90	1-RWS40S8 no jaws
RWS40S8SJ	7.000	4.000	13.90	1-RWS40S8 4-SSJ4000
RWS40S8HJ	7.000	4.000	13.90	1-RWS40S8 4-SCJ4000 4-SHJ4035

**ReLock-8  
Adapter  
Plate is  
available  
on page 170.**



MACHINABLE JAWS		CARRIER & HARD JAWS	
	2.700		1.575
	5.450		2.950
	6.650		4.400
	9.400		8.775
	12.150		13.150

Bodies manufactured from 80,000 PSI ductile cast iron • Ways flame hardened to 40 R/C maximum