


Lever Type Plunger: Locking

- Plunger can be completely withdrawn into the body and locked into a retracted position
- Chamfered plunger for easy alignment
- Built in drive wrench for rapid installation and alignment

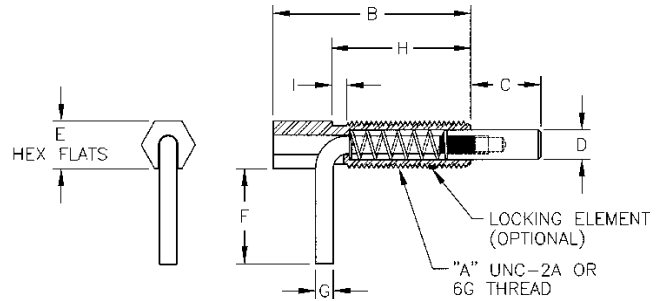

Steel* Part No.	Stainless Steel Part No.	End Force (lbs)		Thread A	B	C	D	Hex E	F	Dia G	H	I	Weight (lbs/100pcs)
		Initial	Final										
54305	54201	0.50	2.50	1/4-20	1.25	0.38	.16	.25	0.50	.09	0.80	*	2
54306	54202	0.75	3.75	3/8-16	2.00	0.56	.23	.38	0.75	.14	1.31	.13	5
54307	54203	1.00	5.00	1/2-13	2.11	0.75	.31	.50	0.93	.19	1.25	.15	10
54308	54204	1.00	5.00	5/8-11	3.05	1.00	.38	.62	1.00	.19	2.00	.18	15

*No thread relief in 1/4-20 thread size **Zinc Plated Clear Chromate Finish



METRIC

Steel** Part No.	Stainless Steel Part No.	End Force (lbs)		Thread A	B mm (in.)	C mm (in.)	D* mm (in.)	E mm (in.)	F mm (in.)	G mm (in.)	H mm (in.)	I mm (in.)
		Initial	Final									
64301	64201	.50	2.5	M6 x 1.0	32 (1.26)	10 (.39)	4 (.157)	6 (.236)	12.7 (.50)	2.3 (.09)	20 (.788)	*
64302	64202	.75	3.75	M10 x 1.5	51 (2)	14 (.55)	6 (.236)	10 (.39)	19 (.75)	3.5 (.14)	33 (1.3)	3.3 (1.3)
64303	64203	1.0	5.0	M12 x 1.75	54 (2.1)	19 (.75)	7 (.275)	12 (.47)	25.4 (1.0)	4.8 (.19)	32 (1.26)	3.8 (.15)

*No thread relief in M6 thread size **Zinc Plated Clear Chromate Finish

Steel Hand Retractable Spring Plunger: Locking

- Fully retractable plunger
- Chamfered plunger for easy alignment
- Easy withdrawing and re-engagement



Steel* Part No.	End Force (lbs)		A	B	Thread C	D	Hex E	Dia F	+0.000 -0.001 G	H
	Initial	Final								
54301	.50	2.50	1.25	.50	1/4-20	.38	1/4	.101	.155	.50
54302	.75	3.75	2.00	1.00	3/8-16	.56	3/8	.134	.234	.74
54303	1.0	5.0	2.11	1.11	1/2-13	.75	1/2	.188	.313	1.00

*Black Oxide Finish

