


HOIST RINGS



Lifting Ring Swivels 360 degrees – Pivots 90 degrees

- Material: Aircraft Quality Alloy
- Finish: Black oxide per mil spec. (cadmium plated available)
- Designed for side mounting applications
- Great for dies and molds
- Rated load from 650 - 15,000 lbs.
- Safety Factor: 4:1
- Certified heat treatment
- 100% magnetic particle inspected

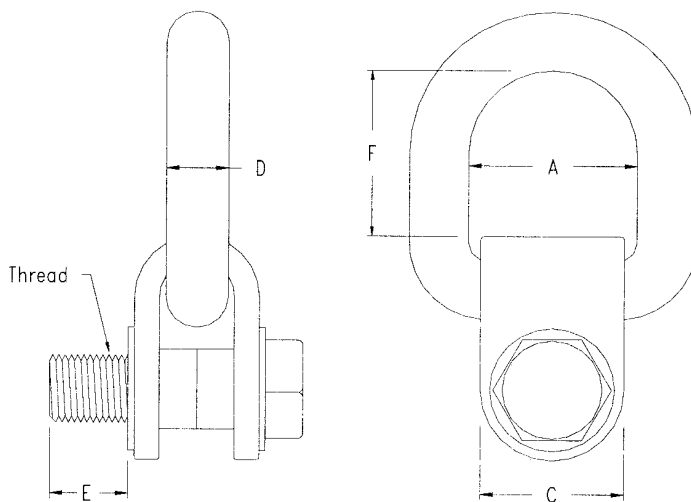

Inch (color coded yellow)

Part No. D-Ring	Part No. Long D-Ring	Rated Load(lbs)	Thread Size	A	C	D	E	D-Ring	F Long D-Ring	Torque (Ft/Lbs)	Wt. (lbs.)
AK43700	-	650	5/16-18	1-7/8	1-1/2	5/8	0.75	2	-	7	1.7
AK43710	AK43711	2,000	1/2-13	1-7/8	1-1/2	5/8	1.25	2.5	3.5	28	2.0
AK43720	AK43721	2,500	5/8-11	1-7/8	1-1/2	5/8	1.25	2.5	3.5	60	2.0
AK43730	AK43731	5,000	3/4-10	2-1/4	2	3/4	2	3	4	100	3.5
AK43740	AK43741	6,500	7/8-9	2-1/4	2	3/4	2	3	4	160	4.0
AK43750	AK43751	7,000	1-8	2-1/4	2	3/4	2	3	4	230	4.0
AK43760	AK43761	12,000	1-1/4-7	3-1/4	3	1-1/8	2.5	4	5.5	470	11.0
AK43770	AK43771	15,000	1-1/2-6	3-1/4	3	1-1/8	3	4	5.5	800	13.0

Metric (color coded blue)

Part No. D-Ring	Part No. Long D-Ring	Rated Load(Kgs)	Thread Size	A	C	D	E	D-Ring	F Long D-Ring	Torque (Kgm)	Wt. (lbs.)
AK43900	-	300	M8x1.25	1-7/8	1-1/2	5/8	25	2	-	0.86	1.7
AK43905	-	400	M10x1.50	1-1/2	1-1/4	5/16	25	2	-	1.5	1.8
AK43910	AK43911	1,000	M12x1.75	1-7/8	1-1/2	5/8	35	2.5	3.5	3.7	2.0
AK43920	AK43921	1,050	M16x2.00	1-7/8	1-1/2	5/8	35	2.5	3.5	8.4	2.0
AK43930	AK43931	2,150	M20x2.50	2-1/4	2	3/4	50	3	4	14	3.5
AK43940	AK43941	3,000	M24x3.00	2-1/4	2	3/4	50	3	4	31	3.7
AK43950	AK43951	5,000	M30x3.50	3-1/4	3	1-1/8	70	4	5.5	60	11.0
AK43960	AK43961	7,000	M36x4.00	3-1/4	3	1-1/8	70	4	5.5	100	13.0