


CLAMPING LEVERS & HANDLES



Zinc Classic Tapped Style – Inch Steel and Stainless Steel

Zinc die cast classic style handle with durable black powder coated finish. RoHs compliant.

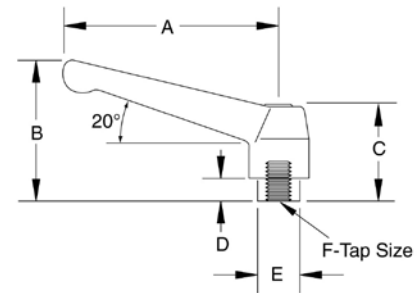

- Material:
 - Handle: Die cast zinc
 - Insert, screw & spring:
 - Steel: Black zinc coated carbon steel
 - Stainless: Grade 303 stainless steel
- Grade 304 and 316 stainless available (special order)
- Lift & Rotate: Handle is adjustable throughout a 360 degree rotation
- Chrome plated version available from stock

Special order stud lengths, materials and colors available

Stainless Part No.	Steel Part No.	A	B	C	D	E	F
70712	70732	1.77	1.38	.95	.13	.39	10-24
70713	70733	1.77	1.38	.95	.13	.39	1/4-20
70715	70735	1.77	1.38	.95	.13	.39	10-32
70716	70736	2.56	1.77	1.22	.24	.53	1/4-20
70717	70737	2.56	1.77	1.22	.24	.53	5/16-18
70720	70740	3.07	2.12	1.41	.29	.63	5/16-18
70721	70741	3.07	2.12	1.41	.29	.63	3/8-16
70724	70744	3.62	2.52	1.69	.35	.75	3/8-16
70725	70745	3.62	2.52	1.69	.35	.75	1/2-13
70728	70748	4.25	2.95	1.98	.47	.91	1/2-13
70729	70749	4.25	2.95	1.98	.47	.91	5/8-11

Unique design reduces the cavity area around the retention screw for less debris accumulation


Plastic Classic Stud Style Steel – Inch

High quality Nylon 6 handle reinforced with 30% glass fiber. Molded in zinc metal teeth make these handles extremely durable.



- Material:
 - Handle: Nylon 6 reinforced with 30% glass fiber
 - Insert, screw & spring: Black zinc coated carbon steel
- Temperature rating: -40F to +265F
- Lift & Rotate: Handle is adjustable throughout a 360 degree rotation

Special order stud lengths, materials and colors available

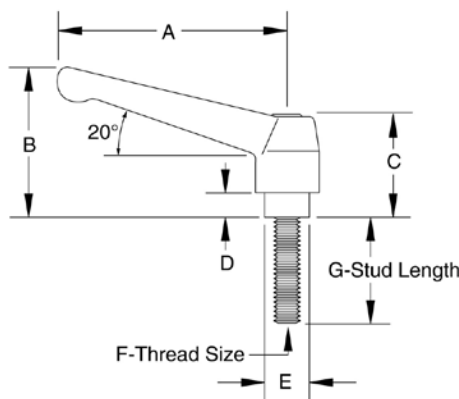

Part No.	A	B	C	D	E	Thread F	Length G
70754	1.77	1.38	.96	.16	.57	10-32	.78
70755	1.77	1.38	.96	.16	.57	10-32	1.18
70761	1.77	1.38	.96	.16	.57	10-24	.59
70762	1.77	1.38	.96	.16	.57	10-24	.78
70763	1.77	1.38	.96	.16	.57	10-24	1.18
70769	1.77	1.38	.96	.16	.57	1/4-20	.59
70770	1.77	1.38	.96	.16	.57	1/4-20	.78
70771	1.77	1.38	.96	.16	.57	1/4-20	1.18
70787	2.48	1.77	1.22	.26	.76	5/16-18	.59
70788	2.48	1.77	1.22	.26	.76	5/16-18	.78
70789	2.48	1.77	1.22	.26	.76	5/16-18	1.18
70790	2.48	1.77	1.22	.26	.76	5/16-18	1.57
70793	2.48	1.77	1.22	.26	.76	5/16-18	2.36
70794	2.48	1.77	1.22	.26	.76	3/8-16	.59
70795	2.48	1.77	1.22	.26	.76	3/8-16	.78
70796	2.48	1.77	1.22	.26	.76	3/8-16	1.18
70797	2.48	1.77	1.22	.26	.76	3/8-16	1.57
70800	2.48	1.77	1.22	.26	.76	3/8-16	2.36
70805	3.07	2.17	1.42	.31	.86	3/8-16	.59
70806	3.07	2.17	1.42	.31	.86	3/8-16	.78
70807	3.07	2.17	1.42	.31	.86	3/8-16	1.18
70808	3.07	2.17	1.42	.31	.86	3/8-16	1.57
70811	3.07	2.17	1.42	.31	.86	3/8-16	2.36
70817	3.07	2.17	1.42	.31	.86	1/2-13	.78
70820	3.07	2.17	1.42	.31	.86	1/2-13	1.57
70823	3.62	2.56	1.69	.43	.99	3/8-16	.59
70824	3.62	2.56	1.69	.43	.99	3/8-16	.78
70825	3.62	2.56	1.69	.43	.99	3/8-16	1.18
70826	3.62	2.56	1.69	.43	.99	3/8-16	1.57
70829	3.62	2.56	1.69	.43	.99	3/8-16	2.36
70834	3.62	2.56	1.69	.43	.99	1/2-13	.59
70835	3.62	2.56	1.69	.43	.99	1/2-13	.78
70836	3.62	2.56	1.69	.43	.99	1/2-13	1.18
70838	3.62	2.56	1.69	.43	.99	1/2-13	1.57
70841	3.62	2.56	1.69	.43	.99	1/2-13	2.36