

HOIST RINGS




Pivot Lifting Plates Pivots 180 degrees

- Material: Aircraft Quality Alloy
- Finish: Black oxide per mil spec. (cadmium plated available)
- Safety Factor: 5:1
- Certified heat treatment
- 100% magnetic particle inspected
- Large bail pivots 180°
- Ideal for certain OEM applications
- Rugged tapered plate minimizes shear force on high strength alloy screw
- Base plate can be welded into position, thus eliminating the use of screws
- Use high tensile alloy screw equivalent to Grade 8



Cap Screws
Not Included

**To obtain maximum load capacity,
high strength alloy screws must be used.**

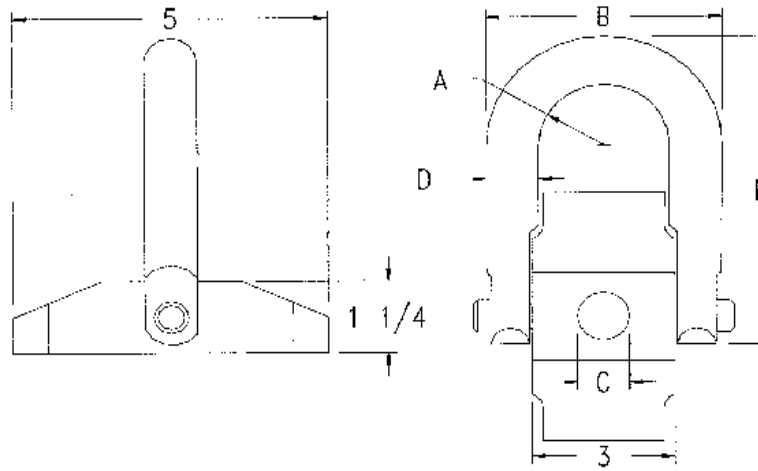

Part No.	Rated Load (lbs)	A	B	C	D	F	Thread Size	Torque Ft/lbs	Wt. (lbs.)
AK44410	7,000	1.40	4-13/16	3/4	1	6-1/2	3/4-10	100	6.8
AK44610	7,000	1.40	4-13/16	3/4	1	8-7/64	3/4-10	100	7.5
AK44415	8,000	1.40	4-13/16	7/8	1	6-1/2	7/8-9	160	6.7
AK44615*	8,000	1.40	4-13/16	7/8	1	8-7/64	7/8-9	160	7.4
AK44420	10,000	1.40	4-13/16	1	1	6-1/2	1-8	230	6.7
AK44620*	10,000	1.40	4-13/16	1	1	8-7/64	1-8	230	7.3

* Long Bar